

FAST ECG AMPLIFIER RECOVERY AFTER DEFIBRILLATION SHOCK

Prof. D.Sc. Ivan Assenov Dotsinsky and Tatyana Neycheva
Center of Biomedical Engineering - Bulgarian Academy of Sciences
Technical University of Sofia
Email: iadoc@argo.bas.bg

Summary: *A procedure for fast ECG amplifier recovery after defibrillation shocks was developed and simulated in the MATLAB environment. Exponentially decaying post-shock voltages have been recorded. Signals from the AHA database are taken and mixed with the recorded exponential disturbances. The algorithm applies moving averaging (comb filter) on the compound input signal, thereby obtaining the samples of the disturbance. They are currently subtracted from the input signal. The results obtained show that its recovery is practically instantaneous.*

Introduction

Recently, the use of defibrillators became widespread practice, due to multiple cases of sudden cardiac death (GILLUM, 1989), resulting mostly from ventricular fibrillation (BECKER *et al.*, 1998).

The success of this action depends to a great extent on ECG recording or monitoring as soon as possible after the shock pulse. According to approved requirements (RECOMMANDATION INTERNATIONALE, 1990; IEC STANDARD, 1988; IEC COMMITTEE DRAFT, 2001), the recording of the ECG signal should be restored not later than 5 to 10 s after defibrillation. However, recently there is an enhanced interest in immediate assessment of the post-shock rhythm (MURAKAWA *et al.*, 1998).

Predominantly patented hardware solutions for reduction of the restoration time have been proposed. Some of them use switchable RC circuit in an integrator, built as feedback to the amplifier second stage (SEGUINE *et al.*, 1998; LAMBERT, 1991). Such solutions lead to generation of artifacts, as the switching occurs mostly during non-zero amplifier output voltage. TRUMMER (1980) proposes to change dynamically the high-pass filter time-constant. HERLEIKSON (1993) reports for the use of compensation voltage to the stage following the RC circuit. In both patents, the efficiency is not commented. No transient processes after defibrillation are presented.

Method

Exponentially decaying post-shock voltages have been recorded. They have a slowly varying time-constant τ with initial value τ_{init} from 1 through 5 s when paddle electrodes are used. Further, τ increases approximately with 0.1% of τ_{init} per sample.


A procedure for fast ECG amplifier recovery after defibrillation shocks was developed and simulated in the MATLAB environment. Signals from the AHA database are taken and mixed with the recorded exponential disturbances. Then the procedure is applied and the filtered signal with the residual disturbance is shown.

Algorithm and amplifier structure

The algorithm applies moving averaging (comb filter) on the compound input signal, thereby obtaining the samples of the disturbance. They are currently subtracted from the input signal.

The moving averaging is dynamic. At the beginning, the first zero of the comb filter f_1 is equal to 3 Hz, corresponding to a cut-off frequency of about 1.5 Hz. Then the sample number used for computation is increased gradually until the first zero reaches $f_2=1$ Hz (0.5 Hz cut-off). The higher cut-off frequencies contribute to a fast initial recovery. The residual disturbances are better suppressed during the following filtering with lower cut-off frequencies.

The software is written in anticipation of a further implementation in real time. The computed values are rounded. In order to reach a desired accuracy, it is necessary to process a 200-times DC amplified signal. This is possible using the structure shown in the diagram bellow (DOTSINSKY *et al.*, 1991; DASKALOV *et al.*, 1998). The amplifier gain is divided in two parts, 5 for the first stage and 40 for the second one. A 16-bit ADC is connected to the second stage output. Each time the corresponding voltage approaches the saturation level, a μ P system controlling the data flow sets an 8-bit DAC, so that an appropriate voltage is generated at its output, thus shifting the signal towards the zero at the input of the second stage.

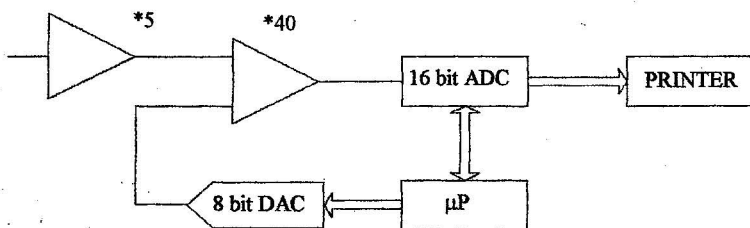

Results and discussion

Processed signal containing disturbance with $\tau_{init}=3$ s is shown in Fig. 1. Obviously, the transient process is very fast. The isoelectric line enters almost immediately within the range of ± 1 mV (related to the amplifier input), i.e. in the half of the paper margin of a 40 mm recorder. The residual disturbance remains less than 20 μ V after the 5-th second. Figure 2 presents the results with $\tau_{init}=5$ and 1 s. In the second case the signal returns a little slowly. The restoration is accelerated if $f_1=2.5$ Hz (Fig. 3). However, thus the residual disturbance is slightly higher compared to that in Fig. 1 and 2.

Conclusions

In addition for the extremely fast recovery with low residual disturbance, another advantage of the procedure is that any cut-off $f_2/2$ may be set by the software, even 3.2 s, which is normally used for morphological analysis.

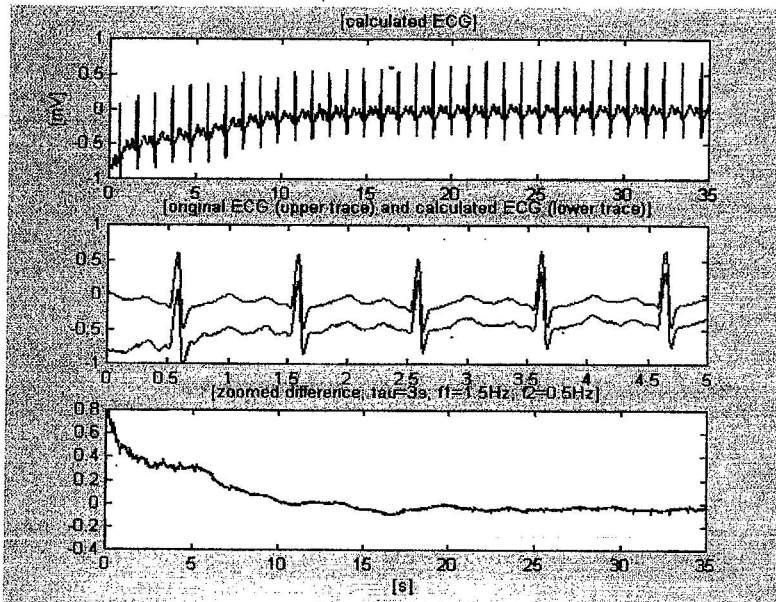
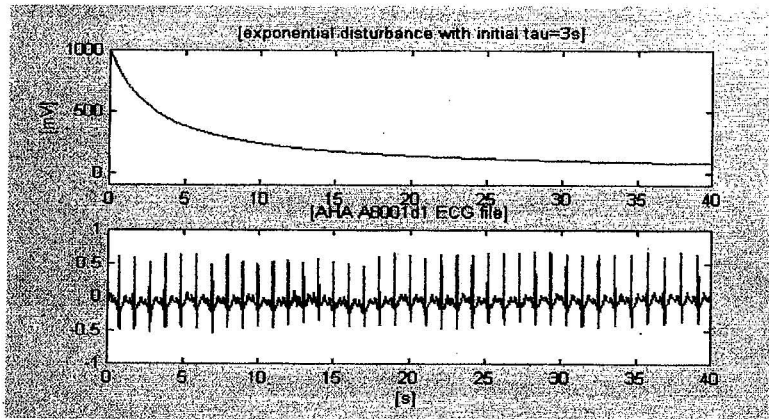


Fig. 1

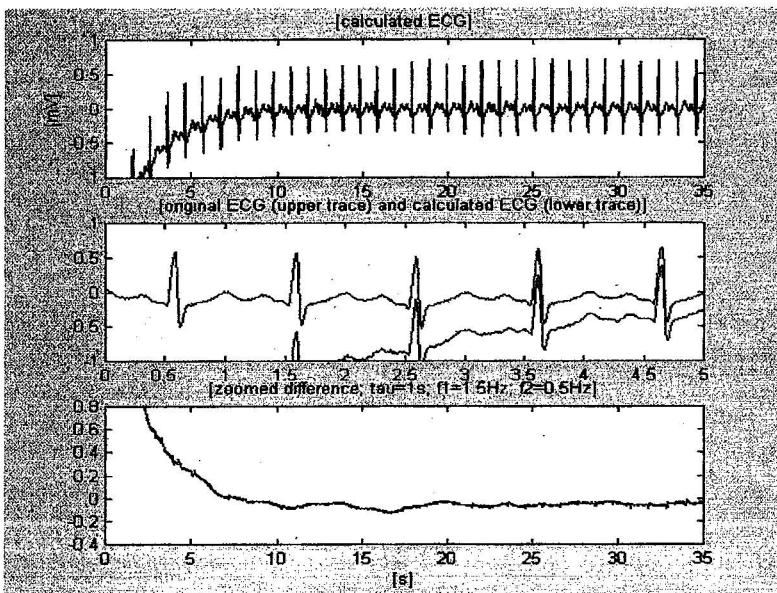
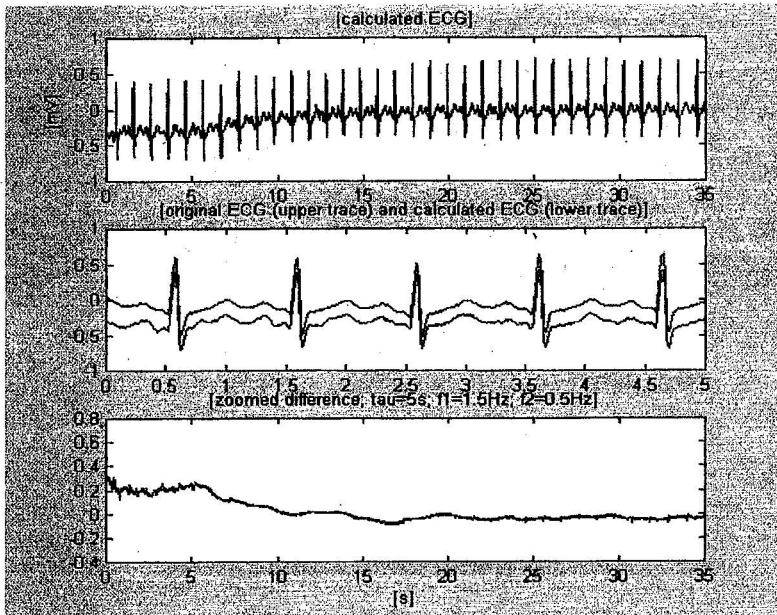


Fig. 2

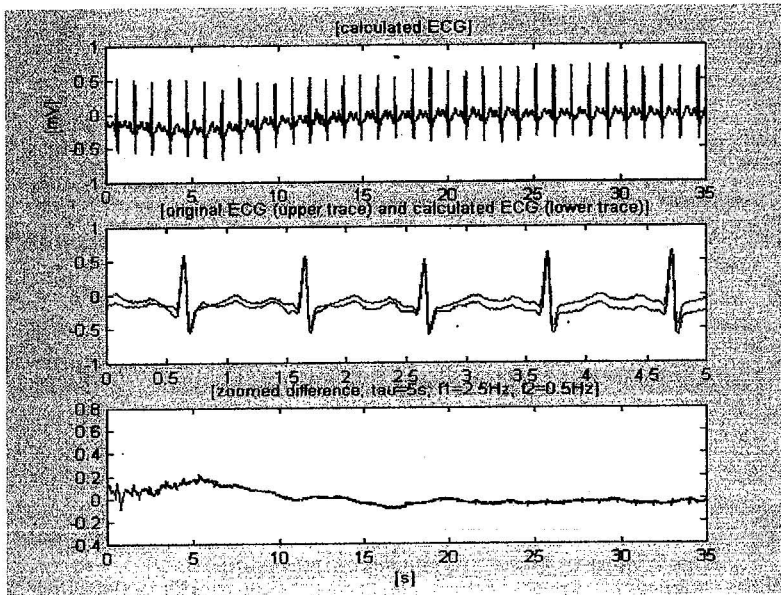
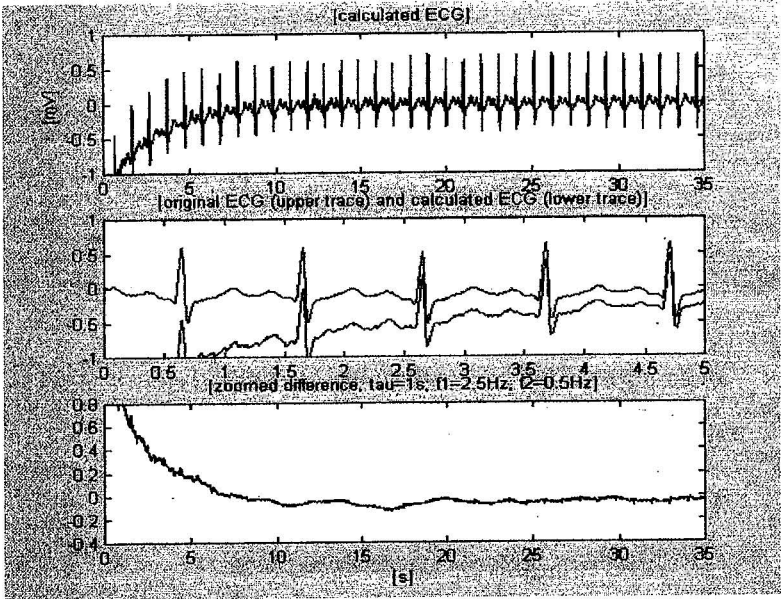


Fig. 3

The disadvantage of the procedure is that it ignores the first 164 ms of the signal (sampled with 250 Hz) and starts the recording with the same delay with respect to real time. The delay reaches up to 500 ms at the 6-th second and does not change further. It is recommended to continue the recording at the end of the 40-th second by excluding the procedure. Thus the ECG signal will be monitored and/or recorded in real time. The relevant information for the heart activity immediately after the defibrillation shock remains available for decision-making by the cardiologist.

References:

- BECKER L., EISENBERG M., FAHRENBRUCH C. and COBB L. (1998): 'Public locations of cardiac arrest: implications for public access defibrillation', *Circulation*, **97**, 2106-2109.
- DASKALOV I.K., DOTSINSKY I.A. and CHRISTOV I.I. (1998): 'Developments in ECG Acquisition, Preprocessing, Parameter Measurement and Recording', *IEEE Eng. in Med. Biol.*, **17**, No 2, 50-58.
- DOTSINSKY I.A., CHRISTOV I.I. and DASKALOV I.K. (1991): 'Multichannel DC amplifier for a microprocessor electroencephalograph', *Med. Biol. Eng. Comput.*, **29**, 324-329.
- GILLUM R.F. (1989): 'Sudden cardiac death in the United States: 1980-1985', *Circulation*, **79**, 756-765.
- HERLEIKSON E.C. (1993): 'Method and apparatus for accurately displaying an ECG signal', *US patent*, 5357969.
- IEC STANDARD (1988): 'Medical Electrical Equipment Part 2-4 Particular requirements for the safety of cardiac defibrillators', *Publication 601-2-4 (2nd Edition, Geneva, International Electrotechnical Commission, IEC Central Bureau)*, p. 49.
- IEC COMMITTEE DRAFT (2001): 'Amendment to IEC 60601-2-4', *2nd Ed.*, 62D/382/DCV, p. 39.
- LAMBERT H. (1991): 'Electronic physiological data monitoring', *European patent*, EP0449574.
- MURAKAWA Y., YAMASHITA T., SEZAKI K. KANESE Y. and OMATA M. (1998): 'Postshock recovery interval of relatively refractory myocardium as a possible explanation for disparate defibrillation efficacy between monophasic and biphasic waveforms', *Pacing and Clinical Electrophysiology*, **21**, 1247-1253.
- RECOMMANDATION INTERNATIONALE (1990): 'Electrocardiographes-Caractéristiques Métrologiques-Méthodes et moyens de vérification', *Organisation Internationale de Métrologie Législative OIML - R90*, p. 24.
- SEGUINE D., STIVE J.R. and LABRASH S.P. (1998): 'Digital sliding pole fast-restore for an electrocardiographic display', *US patent*, 6185450.
- TRUMMER J.R. (1980): 'ECG amplifier overload control', *US patent*, 4319197.